

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 12 TOWNSHIP 14 RANGE 4

DATE: 2-14-02 8-15-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison FD



METHOD OF ESTABLISHMENT: County: 7-12-97

IN. S.P.C. E ZONE NAD '83

NAME: 14041201

N: 492206.3652(m)

E: 67588.8030(m)

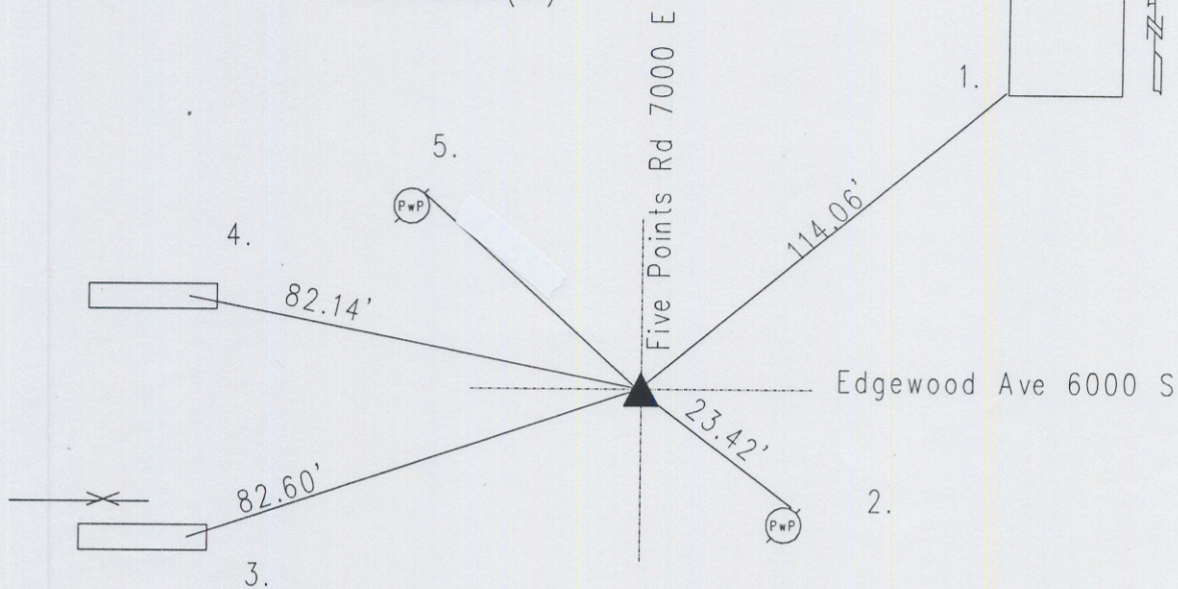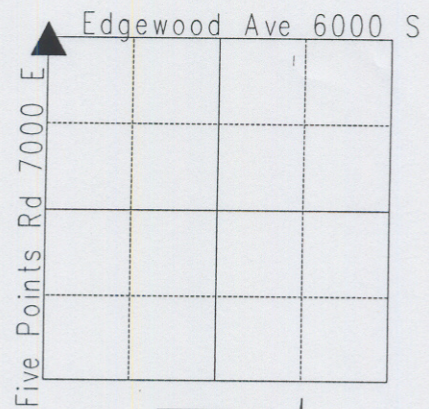

Original post set 1820 by Hendricks with witnesses: 20" beech S 85 W 19 links; 8" elm N 76 E 17 links per Marion County Atlas pg. 9. Hosbrook 11-27-1849 called witness per Franklin Township Legal Survey Book pg. 22. Reference (unknown date) called stone 10" dn. 4-28-71 called same. 4-28-71 (again) called 3/4" steel pin at surface over stone. Excavated 7-18-86 stone fd 12" dn. Too large to remove. Set Harrison 10-17-91. Re-tied 4-24-96. Re-tied 7-12-97 by Kiste. Re-tied 2-14-02 by Wilcoxon.
14041201

REF.	DISTANCE	DESCRIPTION
1.	114.06'	SW corner of ADDRESS 7002
2.	23.42'	PK nail NE PwP#42-738 14"up
3.	82.60'	Cut 'x' E-end of bridge
4.	82.14'	Cut 'x' E-end of bridge
5.	33.47'	PK nail NE PwP no#